


RENEWED GDU™-A JA GDU™-A/GSM DATALOGGERS

FOR MEASURING PRESSURE

Due to its excellent measuring features, GDU™ Data Loggers are well suited for the measurement and monitoring conditions of the asbestos working ground, requiring accurate, low pressure differential measurement and metering data collection. In addition, the meter is easy to use and durable.

The revised model has easy-to-use plug connectors for power supply, pressure hose and external alarm light. The device is available either as a basic or GSM version.

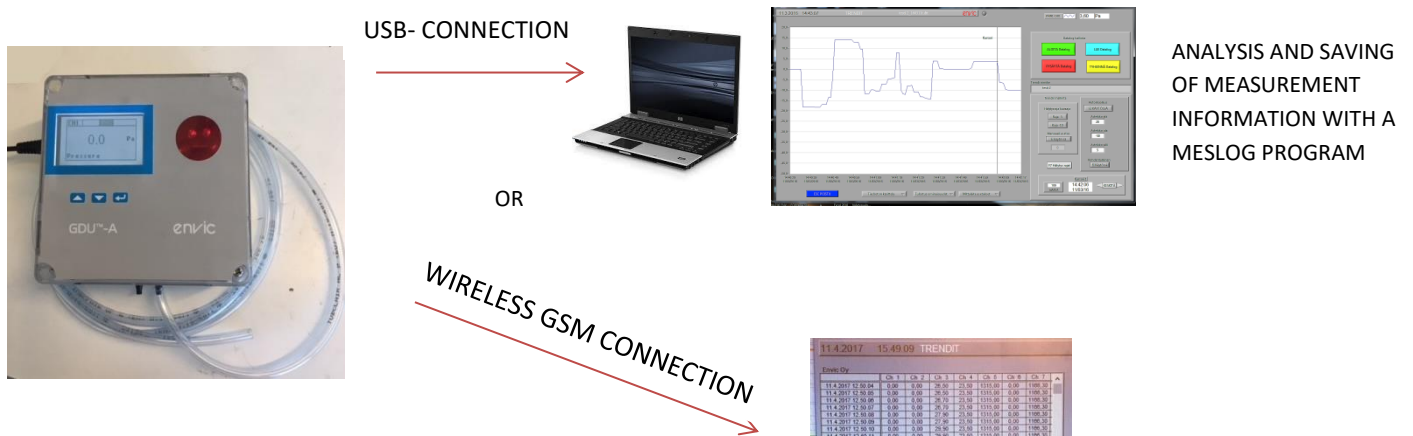

TECHNICAL DETAILS

Meas range	-500+500 Pa, accuracy 3,0 % of reading, 0-point accuracy 0,1 Pa No need to zeroing or no dependency of position
Display	Graphic display 128/64 pixels with back up light
Memory	n. 300 000 measurement outcomes (1,2 milj. option)
Text	12 ASCII signals
Saving	1 sec...2 h
Reading rate	1 sec...45 days
Alarm	Internal err-light, 24 VDC; 0,1 A start for external alarm flashing light
Equipment	Included in plastic tube (5m) for connection the measuring to the measurement point. There is also a possibility to attach external alarm light to the meter.
Program	Meslog D- Lite A
Housing	120x120x60 mm, plastic gray



GSM-MESSAGE TO THE E-MAIL OR DATA MONITORING LOCALLY

- DELIVERY CONTENT:**
- Meter
 - Pressure tube 5 m
 - USB-cabel
 - Power supply 230 VAC/24 VDC
 - Meslog program