


DUST-FREE CONSTRUCTION

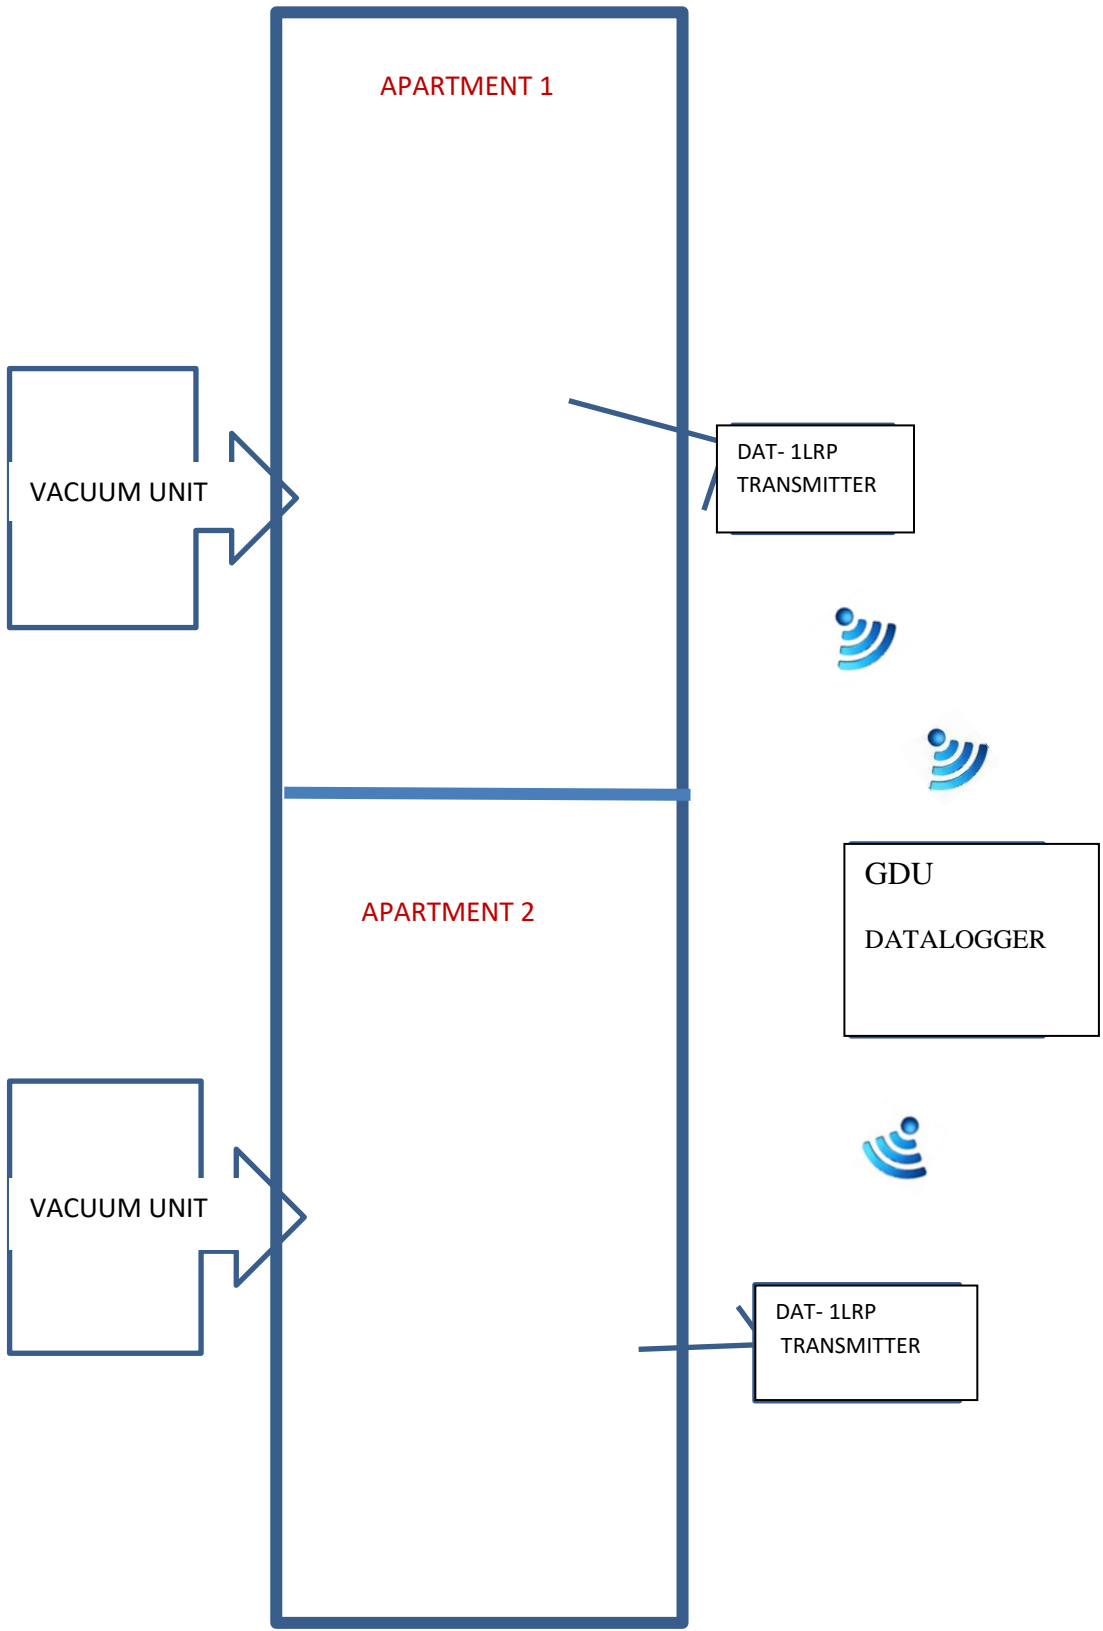

Envic environment control system

Real-time data trending

Users can view a real-time trend of controlled areas to monitor all measured points in one interface. Transmitters send measurement data on the internal ENVINET network to the datalogger. In GSM version data will be sent to the user's email.

Benefits of measuring accuracy

Because the accuracy of measuring differential pressure by DAT-1LRP is excellent (**0,1Pa**) negative pressure can be hold low and avoid unnecessary negative pressure.

Flexible Alarming

Alerts of out-of-tolerance conditions can be alarmed locally with alarm light or remote via SMS text message to the user's mobile phone.